


# Hydrocarbons

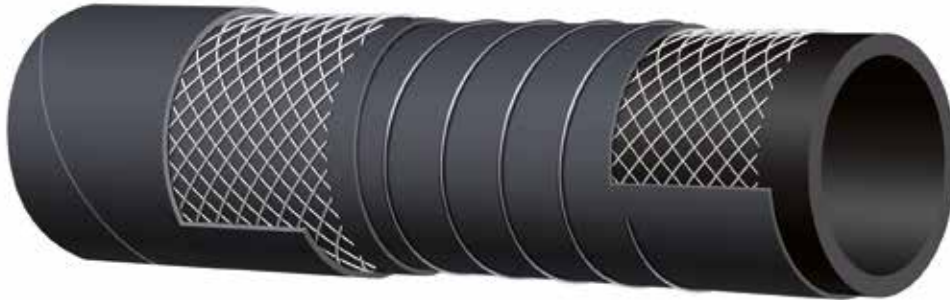

## 60PAA

### Fuel-oil S&D 15 bar (225 psi) - heavy duty exceeds EN 1765/S15

**Tube:** Black NBR

**Reinforcement:** High tensile textile cords with embedded steel helix wire

**Cover:** Black CR- abrasion, ozone, sea water and hydrocarbon resistant

**Use:** Fuel and oil suction and delivery. Designed for long service life in heavy duty applications. Also suitable for bunkering service. Electrically continuous (discontinuous on request)

**Safety factor:** 4:1

**Temperature:** -20 °C +82 °C (-4 °F +180 °F)

mm	inch	mm	inch	bar	psi	mm	inch	%	kg/m	lb/ft
76	3	92	3,62	15	225	450	18,0		3,310	2,225
102	4	120	4,72	15	225	600	24,0		4,010	2,695
152	6	172	6,77	15	225	900	36,0		7,000	4,705
203	8	227	8,94	15	225	1200	40,0		12,100	8,135