


Concrete

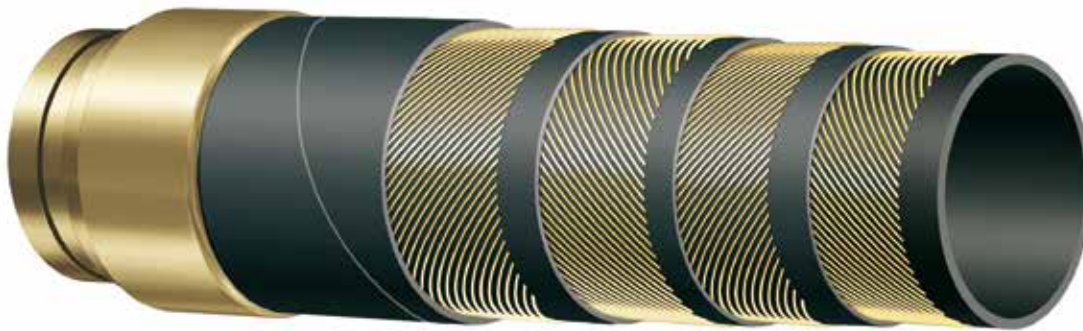

740AA

Concrete pumping 85 bar (1275 psi) heavy duty - steel reinforced

Tube: Black conductive NR - abrasion resistant

Reinforcement: High tensile steel cords

Cover: Black conductive SBR/NR - abrasion and ozone resistant

Use: High pressure concrete pumping

Safety factor: 2:1

Temperature: -30 °C +80 °C (-22 °F +176 °F)

mm	inch	mm	inch	bar	psi	mm	inch	%	kg/m	lb/ft
51	2	69	2,72	85	1275	255	10,00		2,130	1,435
63	2 1/2	85	3,35	85	1275	265	10,50		3,340	2,245
76	3	100	3,94	85	1275	380	15,00		4,540	3,055
90	3 1/2	116	4,57	85	1275	450	17,50		5,490	3,690
102	4	126	4,96	85	1275	510	20,00		6,530	4,390
102	4	128	5,04	85	1275	510	20,00		7,020	4,720
127	5	153	6,02	85	1275	635	25,00		9,740	6,550
127	5	155	6,10	85	1275	635	25,00		10,340	6,950
152	6	184	7,24	85	1275	760	30,00		13,780	9,265